

Abrasive Qualities

SOLID-BODY PLASTIC AODD PUMPS FROM ALMATEC® RELIABLY DELIVER THE OPERATIONAL ABILITY REQUIRED FOR THE MOST CHALLENGING ABRASIVE-HANDLING APPLICATIONS

By Xavier Rasotto



Manufacturers count on Almatec® Plastic AODD Pumps to efficiently transfer abrasive media with little or no downtime.

Introduction

Though the actual originator of the epigram, “Laws are like sausages, it’s better not to see them being made,” is unknown—it’s generally attributed to the 19th-century German statesman Otto von Bismarck—the sentiment that it portrays is easy to grasp: While we may like and respect the outcome, sometimes it’s best not to know how it was achieved.

The same saying can also apply to the manufacturing industry. While you may be dazzled by the shine on the chrome of an automobile or marvel at your mirror-like reflection on the surface of a highly glazed piece of pottery, you really have no idea just how harsh the manufacturing conditions needed to be in order to produce the desired end result. Innumerable objects that we see and use in our daily lives only achieved their final form after a harsh production process that may have included the use of any number of abrasive media.

This white paper will examine several manufacturing applications or components where abrasive chemicals are used and the best type of pump technology to incorporate

in those processes. Choosing the right pump will not only ensure that the desired final product is produced, but that the entire manufacturing process will be completed efficiently and effectively at a cost-conscious rate, and with a minimum of potentially costly pump maintenance and downtime.

The Challenge

While consumers may be blissfully unaware of the trying conditions that were required to produce their favorite piece of jewelry or the ink that is used to print the words on their daily newspaper, the manufacturers of those, and thousands of other products, aren’t. The conditions in which their products are created must be a front-of-mind concern to manufacturers, as are the specific pieces of equipment that are used to complete the manufacturing process.

Examples of the types of manufacturing processes or components that can require abrasive chemical compounds would include:

Pickling Baths. When metal is “pickled,” in a process that is also known as tarnision, a surface treatment is used to remove any impurities, such as inorganic contaminants, stains,



Challenging abrasive-handling applications that require the right pump technology include printing inks, lime slurry, silicone carbide slurry, ceramic mass/glaze, pickling baths and electroplating.

rust or scale that can discolor the steel. The pickling bath, or tarnish liquor, that is used to facilitate this treatment primarily consists of hydrochloric acid, though steels with an alloy content greater than 6% must be pickled in two stages—the initial hydrochloric acid stage, followed by submersion in another strong acid, such as nitric, phosphoric or hydrofluoric. Pickling is used in jewelry-making to remove the oxidation layer from copper, which occurs after heating. The waste product from steel pickling, known as pickling sludge, includes acidic rinse waters, metallic salts and waste acid, all of which make it a hazardous waste that needs to be neutralized with lime before it can be disposed of in a landfill.

Silicon Carbide Slurry. Slurry is a generic term for any type of thick suspension of solids in a liquid. Silicon carbide slurry is used in a variety of applications in the construction, ceramics, paper and explosives industries, among many others. It is made from a mixture of powdered silicon carbide that is suspended in polyethylene, diethylene glycol or an oil-based fluid. Silicon carbide is an extremely hard, durable, heat-resistant compound. Grains of silicon carbide can be sintered together to help form very hard ceramics that can be used in the manufacture of such diverse products as solar cells, car brakes and bulletproof vests. Because of its degree of hardness, silicon carbide is often used as a cutting liquid, or slurry, in the manufacture of solar cells and wafers, for example. Most silicon carbide slurries are mixed by the manufacturer, who purchases the silicon carbide powder by the size of the “grit” needed, then mixes it with the preferred liquid. Once the slurry is created, it is pumped to storage tanks until needed.

Electroplating. Electrodeposition is the name of the process used in electroplating. In the electrodeposition process, metal ions in a solution are transferred via an electric field to coat an electrode. It is primarily used to deposit a layer of a material, such as a metal, on an object in an attempt to give it a preferred property, such as wear-resistance, lubricity or corrosion protection. The electrodeposition process occurs when the components are introduced to an electrolyte solution that contains one or more dissolved metal salts and other ions that enable the flow of electricity. Depending on the object that is to be plated, the electrolyte solution can be very abrasive.

Printing Inks. Printing inks are actually divided into two categories: writing inks and printing inks, with printing inks consisting of two distinct subcategories; ink for conventional printing (where an image is transferred to the paper or object to be printed on via mechanical plate) and ink for digital non-impact printing (electrophotographic and ink-jet technologies). All types of inks are made with a wide variety of components, many of which can be abrasive. Color inks, for example, are made with a solvent that is generally produced from petroleum distillates, linseed oil or soybean oil, while the pigments are made up of various dyes. Titanium dioxide can be used to adjust the color characteristics of color inks. All types of inks may also contain additives such as lubricants, waxes, surfactants and drying agents.

Lime Slurry. By definition, lime slurry is an alkali that is a suspension of calcium hydroxide in water. It has a variety of uses in industrial, municipal and environmental applications, such as metals precipitation, odor control, sludge stabilization, lime softening and pH adjustment. While it is easy to pump by itself, when lime slurry reacts with water, a condition known as “plating out” may occur. When this does occur, all surfaces that come in contact with the lime slurry are in danger of being caked with lime, including the pumps that are used to transfer it, which can cause certain types of pumps to malfunction. Lime slurries can also contain additional abrasive solids, such as grit and pebbles, that can wear down a pump’s internal components and lessen its efficiency and reliability.

Ceramic Mass/Glaze. Mass finishing is a common method of finishing metals that cleans, deburrs and polishes the surface. An abrasive ceramic media is used to facilitate the finishing process. Glaze is defined as “a layer or coating of a vitreous substance that has been fused to a ceramic object through firing.” Before application, ceramic glazes can be abrasive, as they consist of miniscule shards of glass-forming silica in combination with a metal-oxide mixture consisting



Almatec® E-Series AODD Pumps used for transferring slurry in the solar industry.


of sodium, potassium and calcium, which allow the glaze to melt; alumina, which stiffens the glaze and prevents it from running; colorants such as iron oxide, copper carbonate or cobalt carbonate; and opacifiers like zirconium oxide and tin oxide.

The Solution

While many types of pumping technologies have been tried and found wanting in these (and other) harsh manufacturing applications, one has proven to be a reliable performer where a wide range of abrasive components need to be handled safely, efficiently and reliably: solid-body plastic air-operated double-diaphragm (AODD) pumps.

Solid-body plastic AODD pumps have many features that set them apart from other pump technologies when it comes to abrasive-handling applications. They do not require electricity, they are self-priming and they can pump a wide range of abrasive media—from slurries to liquids with suspended solids. Plastic AODD pumps are positive-displacement pumps that have a diaphragm in each of their two pumping chambers. These diaphragms are connected by a shaft so that when the compression stroke takes place in one chamber during the pumping process, the suction stroke takes place simultaneously in the other chamber. This results in efficient, reliable, cost-effective, repeatable operation when handling any number of abrasive liquids or compounds.

Almatec® has been a premier manufacturer in the design and production of plastic AODD pump technology since its inception in 1984. Today, Almatec is headquartered in

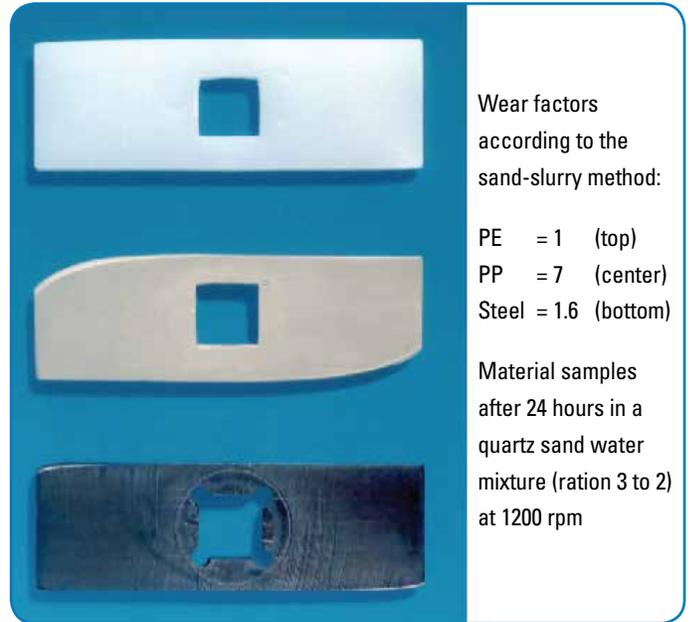

Wear factors according to the sand-slurry method:

PE = 1 (top)
 PP = 7 (center)
 Steel = 1.6 (bottom)

Material samples after 24 hours in a quartz sand water mixture (ration 3 to 2) at 1200 rpm

The abrasion resistance of polyethylene is seven times higher than that of polypropylene, and 1.6 times higher than steel.

Kamp-Lintfort, Germany, and the company has set the standard with its E-Series family of pumps that are specifically designed for use in abrasive-handling applications.

All E-Series pumps feature a solid design and most are constructed of polyethylene (PE), which offers excellent abrasion-resistance when used with slurries and other abrasive media. The abrasion resistance of E-Series pumps, thanks to their PE construction, is seven times higher than that of polypropylene—while having similar chemical-resistance characteristics—and 1.6 times higher than steel. Solid PE also delivers better sealing, higher static weight, smoother operation and better torque retention than other popular materials of construction. For specific applications where pumps in conductive materials and/or pump materials with universal chemical resistance are needed, E-Series pumps can also be constructed of PE conductive, PTFE (polytetrafluoroethylene) and PTFE conductive. All of the pump's cylinder valves are constructed with PTFE with the diaphragms (EPDM, PTFE/EPDM and NBR) and ball valves (EPDM, PTFE, NBR and stainless steel) available in a range of materials.

All of the housing parts on an E-Series pump are tightened to each other via housing bolts. However, instead of single bolts that press punctually against the housing, all of the bolts are tightened against a diaphragm-sized ring on each side of the pump. This results in a more even spreading of the housing-bolt force and an increase in permissible bolt torque, which enhances safety and reliability. An optimized flow pattern reduces the pump's flow resistance, which results in increased efficiency and lower air consumption.

Other standout features found in E-Series pumps include:

- The patented maintenance- and lubrication-free PERSWING P® air-control system, which ensures accurate reversal of the main piston
- Internal Piston Diaphragm (IPD) technology
- Integral dampeners for constant flow with no need for additional piping
- ATEX conformity
- Variable port configurations
- No drives, rotating parts or shaft seals
- Easy startup
- Options include: a barrier chamber for leak prevention; drain system; stroke counting; diaphragm-monitoring system; and transport cart

Almatec offers its E-Series pumps in seven port sizes, from 1/4" to 3", with flow rates ranging from 15 to 800 L/min (4 to 210 gpm).

Conclusion

It's a fact of manufacturing: abrasive liquids and compounds need to play a role in the creation of some of the world's most recognizable products. These products only get made, however, if the equipment used to produce them can meet the challenges of handling and transferring a wide range of harsh and abrasive chemicals. For three decades, Almatec has identified the challenges inherent in abrasive-handling applications and has developed and provided the solid-body plastic AODD pumping technology that is best-suited for use in these demanding manufacturing atmospheres.



Almatec® E-Series Pumps with solid-body plastic construction safely transfer abrasive components.

About the Author:

Xavier Rasotto is the Chemical Market Manager, EMEA, with Almatec® and Pump Solutions Group (PSG®). He can be reached at Xavier.Rasotto@psgdover.com. Almatec is one of the world's leading manufacturers of air-operated double-diaphragm (AODD) pumps and is an operating company within Dover Corporation's Pump Solutions Group (PSG®). PSG is comprised of several of the world's leading pump brands including Abaque®, Almatec®, Blackmer®, Griswold™, Neptune™, Maag, Movex®, Quattroflow™ and Wilden®. You can find more information on Almatec at www.almatec.de or PSG at www.psgdover.com.



www.almatec.de

World Headquarters

ALMATEC Maschinenbau GmbH
Carl-Friedrich-Gauß-Straße 5
47475 Kamp-Lintfort
Germany

