





CHARACTERISTIC CURVES
Models: GX4, X4, XH4

Page Number	101-031
Effective	Oct 2015
Replaces	Dec 2007
Section	101

1 CP (30 SSU)*

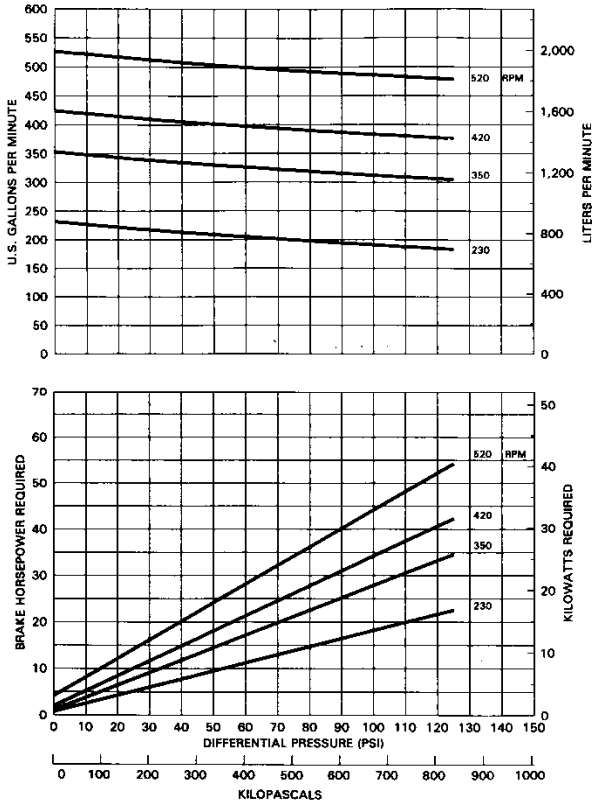

20 CP (100 SSU)*

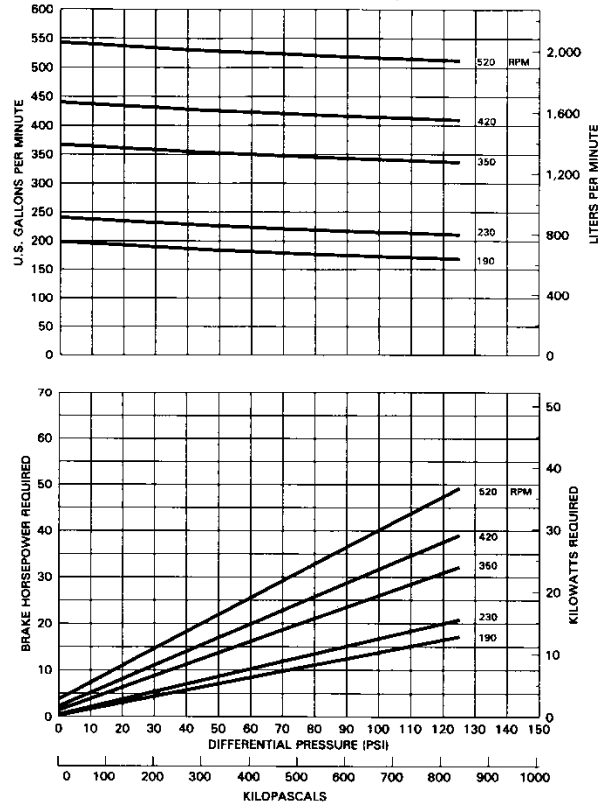

Note: Non-metallic vanes Only.

Note: Non-metallic vanes Only.


Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.


*Centipoise (cP) to SSU conversion is based on a fluid specific gravity of 1.0.
Centipoise = centistokes at 1.0 specific gravity.

CHARACTERISTIC CURVES

Models: GX4, X4, XH4

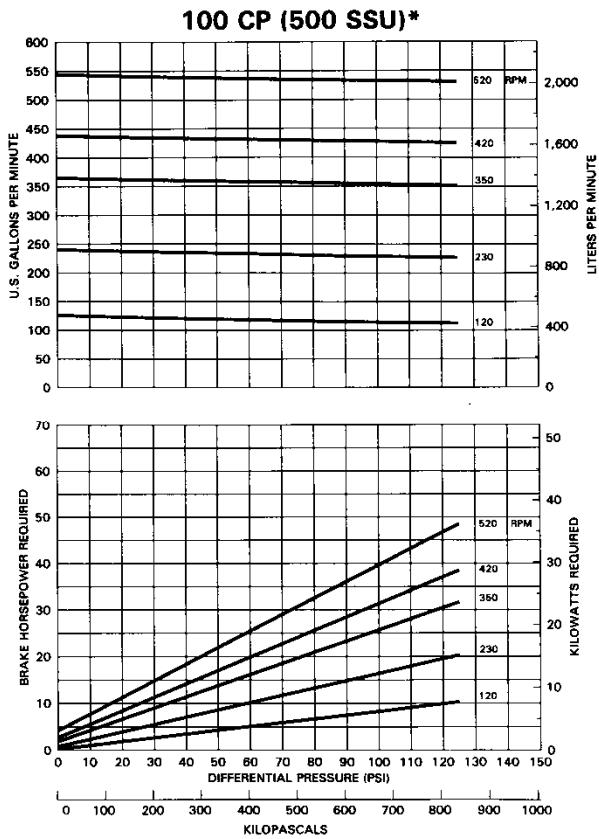

Note: Non-metallic or metallic vanes.

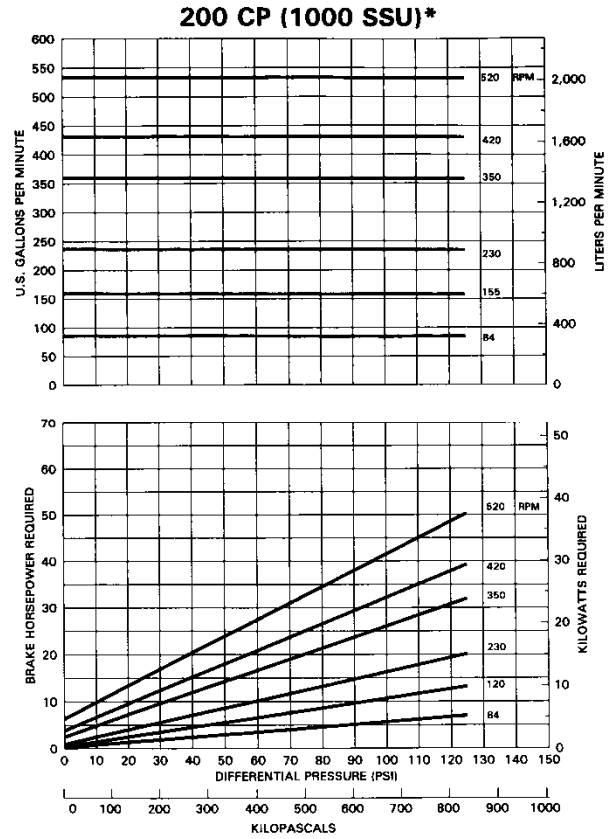

Note: Non-metallic or metallic vanes.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.


Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

*Centipoise (cP) to SSU conversion is based on a fluid specific gravity of 1.0.
Centipoise = centistokes at 1.0 specific gravity.




CHARACTERISTIC CURVES

Models: GX4, X4, XH4

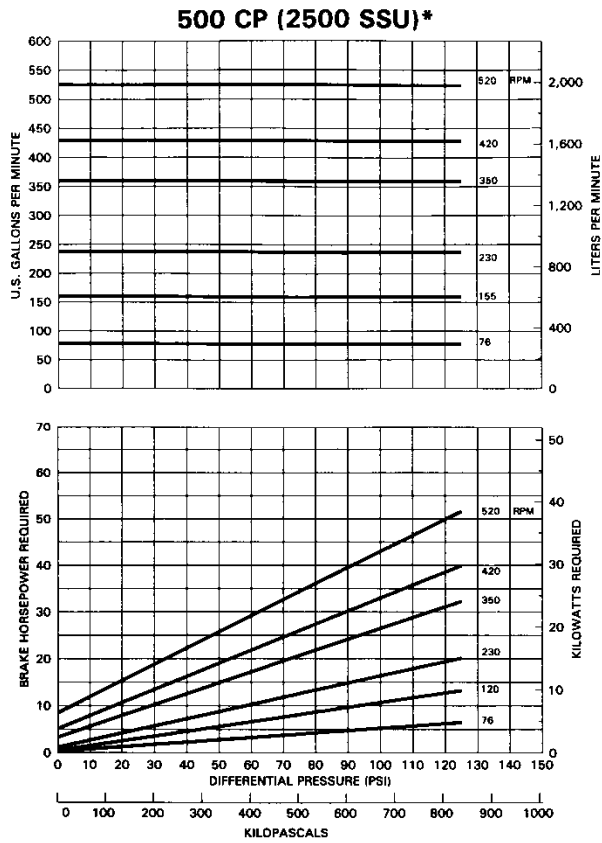

Note: Non-metallic or metallic vanes.

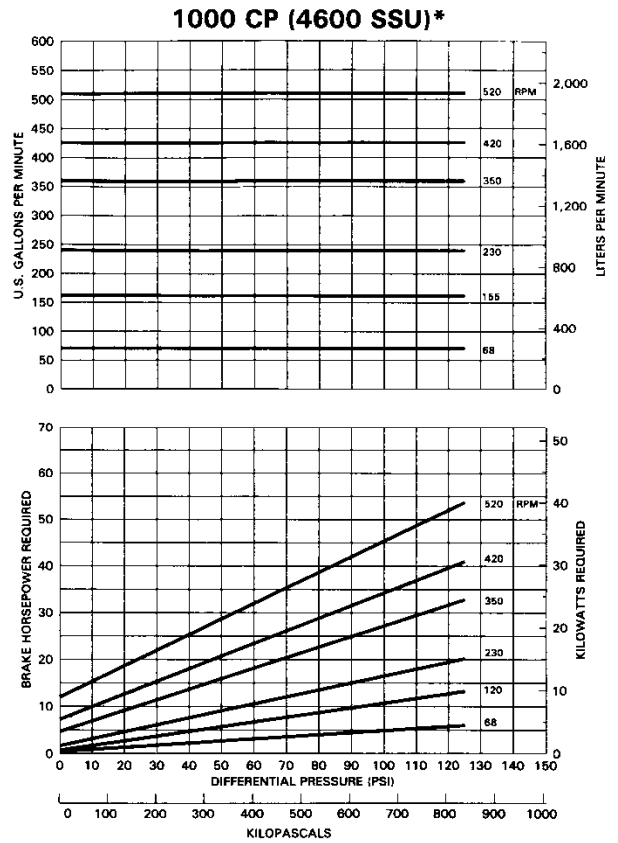

Note: Non-metallic or metallic vanes.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.


*Centipoise (cP) to SSU conversion is based on a fluid specific gravity of 1.0.
Centipoise = centistokes at 1.0 specific gravity.



CHARACTERISTIC CURVES


Models: GX4, X4, XH4

2100 CP (10,000 SSU)*

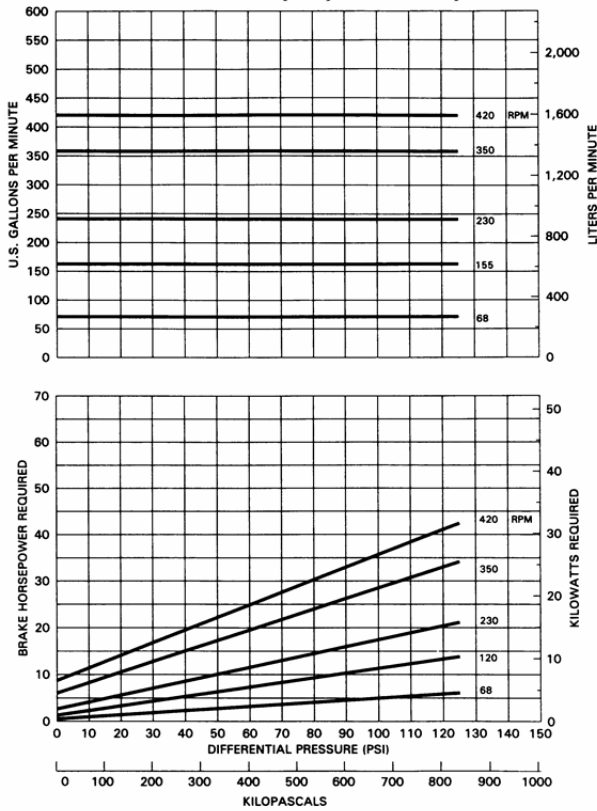

Note: Non-metallic or metallic vanes. Metallic vanes recommended above 2100 cP (10,000 SSU).

4250 CP (20,000 SSU)*

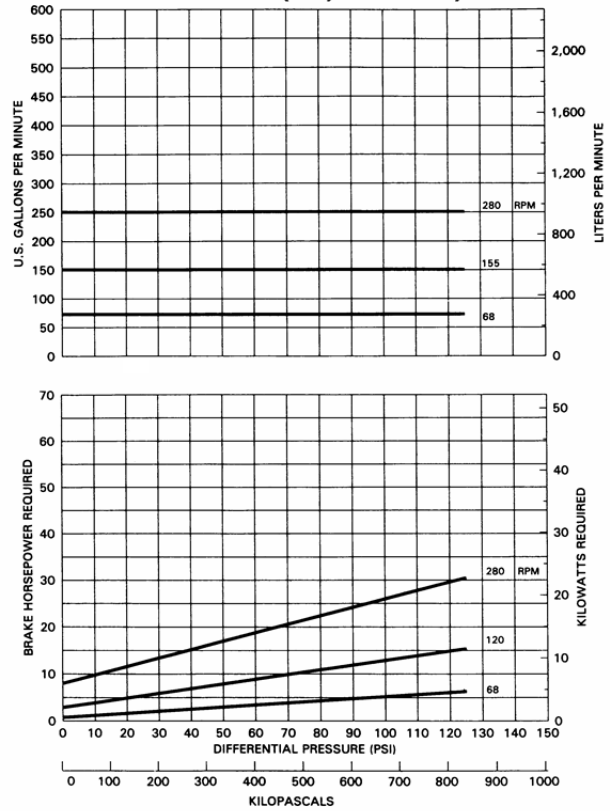

Note: Metallic vanes recommended.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

*Centipoise (cP) to SSU conversion is based on a fluid specific gravity of 1.0.
Centipoise = centistokes at 1.0 specific gravity.

